




Put the sling on from in front and let the user put his arms through the lifting straps. Then cross the straps on the back in the opposite rings.

If leg straps are used, introduce these under the thighs close to the groin. Fasten the straps to the sling with the buckles.

1

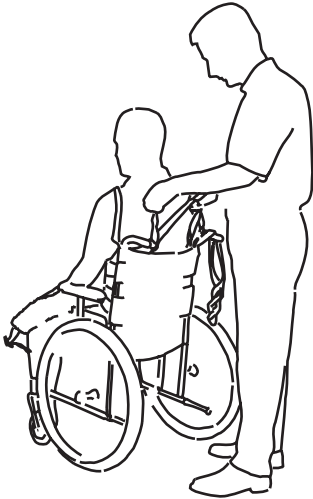


2

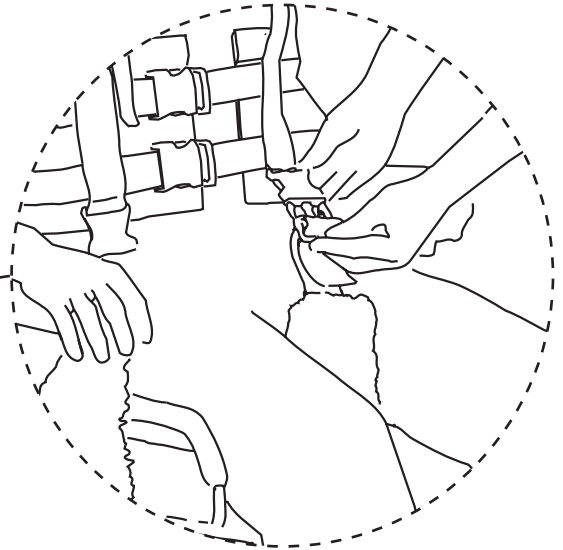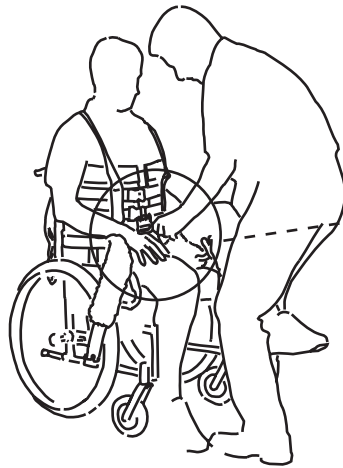


3




4

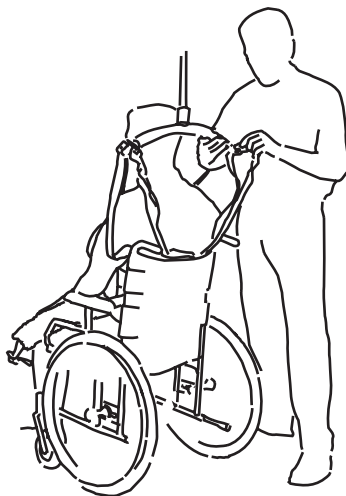

5

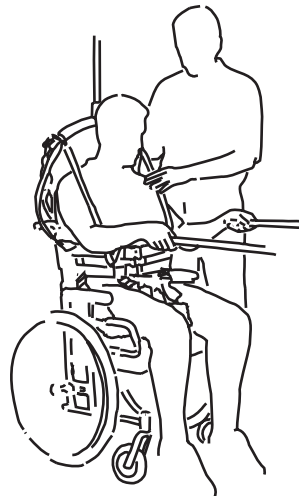

6

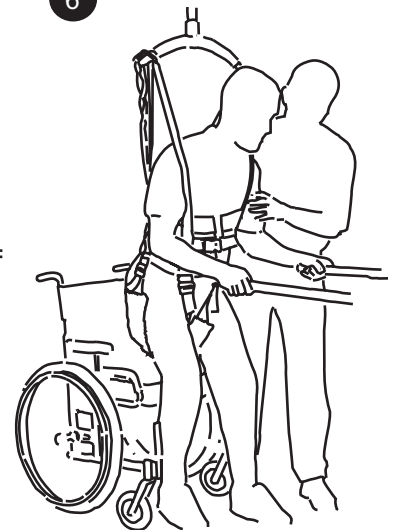

Check that the lifting and support straps are placed correctly and that the leg straps are not too tight.

Hook the straps on to the lifting hanger. Check that the support straps on the back are tightened correctly.

Let the user lean forward to bear his weight on the chest. Then activate the ceiling hoist. Ask the user to raise as naturally as possible, though still bearing his weight on the chest.

Do not raise the lifting hanger too high up, as the user will then be lifted.

As an alternative the sling can be hung on the hanger. It then buttons on the front.

## taylordolman

tel: 0845 838 0600  
email: [info@taylordolman.com](mailto:info@taylordolman.com)  
[www.taylordolman.com](http://www.taylordolman.com)