taylordolman



Screen-Systems HealthCare - since 1976




email: info@taylordolman.com www.taylordolman.com



















ropimex® HyGentle®

Product design and material combination for maximum hygiene

Product design:

Hygiene starts with the design. Corners, angles or geometries that are ill-suited for cleaning and disinfection are avoided to the greatest possible extent.

Material composition:

Cleanability and disinfectability are prioritized in the selection of the materials required for manufacturing the product. This is aimed at achieving an optimum where soiling and microbiological pollution are concerned. Porous, absorbent surfaces must be avoided.

Cleaning and disinfection:

We test and document the materials of our products in terms of their natural microbial contamination, just as we document their cleanability and disinfectability with commercially available detergents and disinfectants.

CE - Medical device

ropimex®- products meet the requirements of the regulatory specifications for medical devices.






| Telescopic screens, Telescopic arms 4 - 13 |
|--|
| Wall brackets / Brackets for equipment rails 14 - 15 |
| Mobile screens 16 - 17 |
| Vario rail system 18 - 21 |
| Curtains |



| ropicare Folding curtain | 26 - | 27 |
|--------------------------|------|----|
| Lamella screen | 28 - | 29 |
| Folding screens | 30 - | 43 |
| Butterfly Folding wall | 38 - | 39 |
| DIVI max Folding wall | 40 - | 43 |
| Paravents | 44 - | 47 |
| Butterfly Paravent | 48 - | 49 |
| Shower splash guard | 50 - | 51 |
| About us / Certificates | 52 - | 53 |



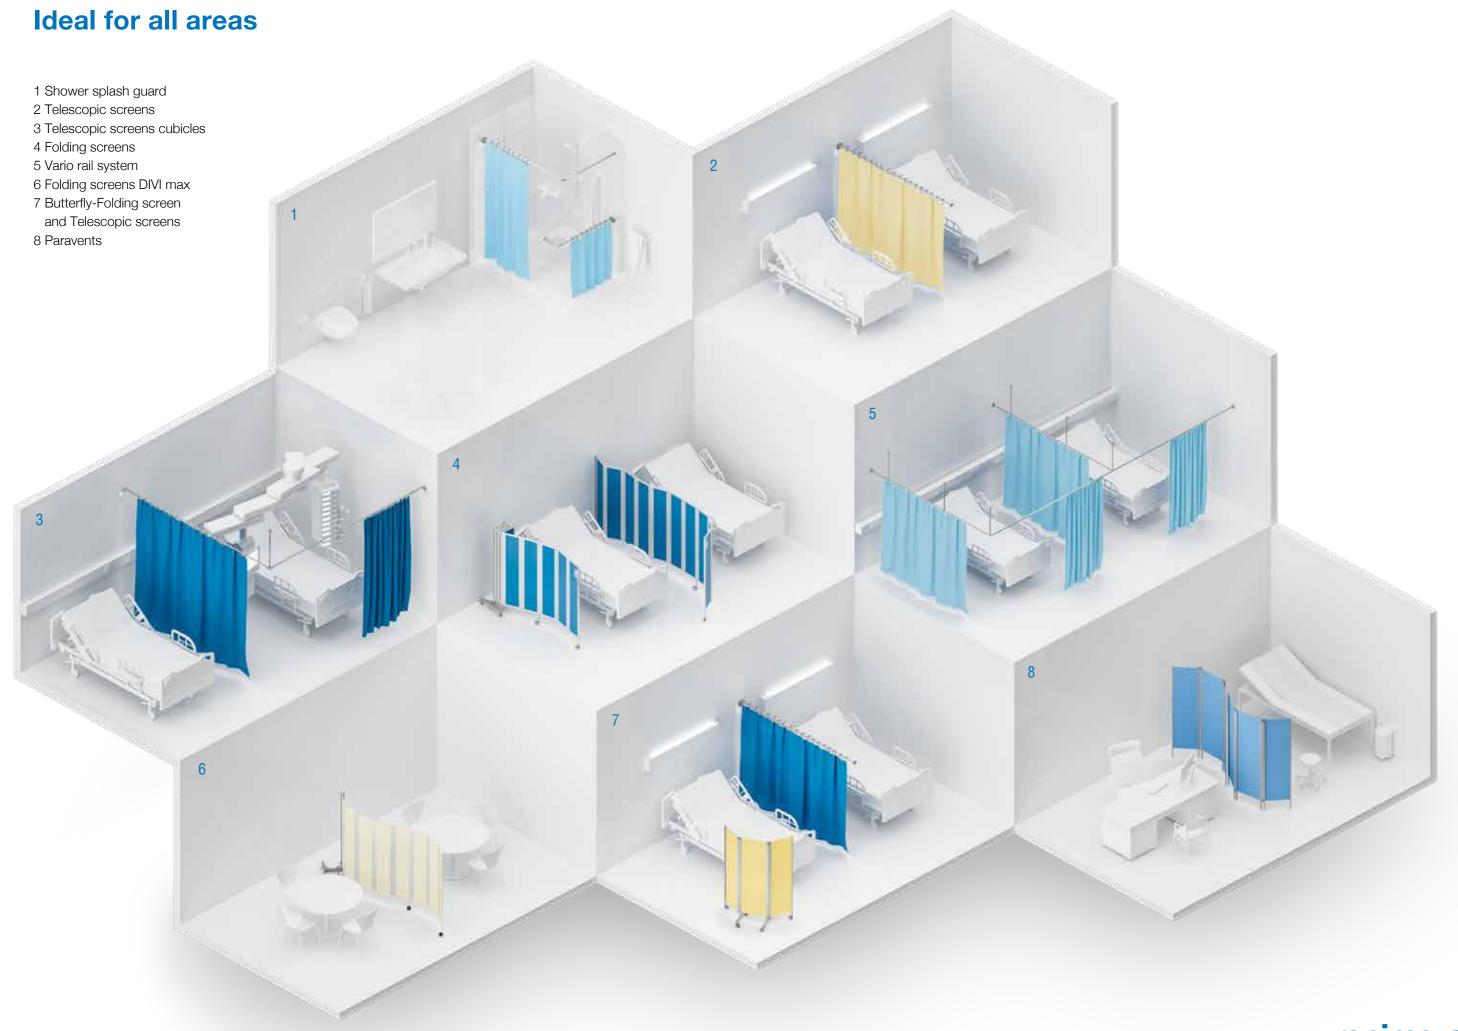

Telescopes of the new generation







ropimex® HyGentle®: Product design and material combination for maximum hygiene

The ropimex® telescopes of the new generation are optimized in handling, cleaning and disinfection by means of seamlessly integrated mechanics and particularly smooth, hygiene-friendly surfaces. ropimex® curtains, washable and disinfectable complete the hygiene concept.





Smooth telescopic tubes and plastics for one hygiene-friendly surface.



Bending mechanism seamlessly integrated.



Integrated stop mechanism for the curtain rings



If the curtain rings are loaded they release themselves from the eyelets of the curtains and therefore avoid injuries and damage to the system.



Tail with
Locking fixed telescope at rest





Direct to the product video














RTS models in the doctor's surgery

RTS models in the retirement and care home

One telescopic screen can be used to screen off several beds,
which have been previously fitted with brackets

RTS: Telescopic screen, swing-out, self-supporting

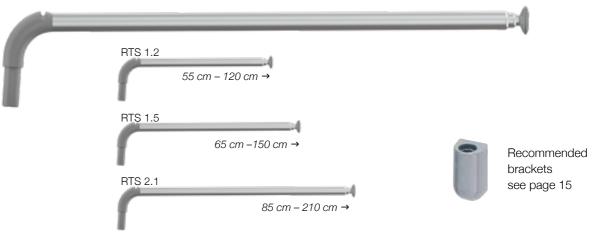

Material

ropimex® telescopic screens are made of anodised aluminium, high-quality, glass-fibre reinforced plastics. Easy to clean and to disinfect.

 ϵ

| Model | Telescopic screen extension | Weight | Rings | Recommended curtains (see p. 22-23) |
|---------|-----------------------------|--------|-------|--|
| RTS 1.2 | 120 cm | 0,5 kg | 10 | TCS 121, TCS 122, TCS 123, CQ 121, CQ 122, VHC 121, VHC 122 |
| RTS 1.5 | 150 cm | 0,6 kg | 13 | TCS 151, TCS 152, TCS 153, CQ 151, CQ 152, VHC 151, VHC 152 |
| RTS 2.1 | 210 cm | 0,7 kg | 17 | TCS 211, TCS 212, TCS 213, CQ 211, CQ 212, VHC 211, VHC 212 |

VR: Curtain rings



ropimex® curtain rings are always included with telescopic screens, telescopic arms and telescopic screen cubicles. Curtain rings can also be supplied separately. Standard colour: grey



If they are loaded they release themselves from the eyelets of the curtains and therefore avoid injuries and damage to the system.














RTI models in the multi-bed room and on the intensive care unit.

One telescopic screen can be used to screen off several beds, which have been previously fitted with brackets

RTI: Telescopic screen, fold-down and swing-out, self-supporting

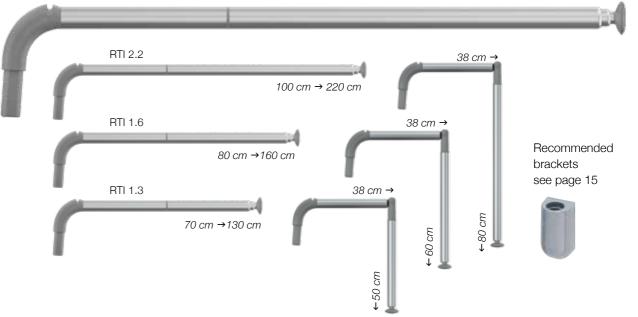

ropimex® telescopic screens are made of anodised aluminium, high-quality, glass-fibre reinforced plastics. Fasy to clean and to disinfect. glass-fibre reinforced plastics. Easy to clean and to disinfect.



| Model | Telescopic screen extension | Weight | Rings | Recommended curtains (see p. 22-23) |
|---------|-----------------------------|--------|-------|--|
| RTI 1.3 | 130 cm | 0,6 kg | 10 | TCS 121, TCS 122, TCS 123, CQ 121, CQ 122, VHC 121, VHC 122 |
| RTI 1.6 | 160 cm | 0,7 kg | 13 | TCS 151, TCS 152, TCS 153, CQ 151, CQ 152, VHC 151, VHC 152 |
| RTI 2.2 | 220 cm | 0,8 kg | 17 | TCS 211, TCS 212, TCS 213, CQ 211, CQ 212, VHC 211, VHC 212 |

VR: Curtain rings



ropimex® curtain rings are always included with telescopic screens, telescopic arms and telescopic screen cubicles. Curtain rings can also be supplied separately. Standard colour: grey.



If they are loaded they release themselves from the eyelets of the curtains and therefore avoid injuries and damage to the system.















If the GL cannot be mounted, e.g. on the window, a ceiling mount is used

RTH: Telescopic arms, with hooks fold-down and swing-out

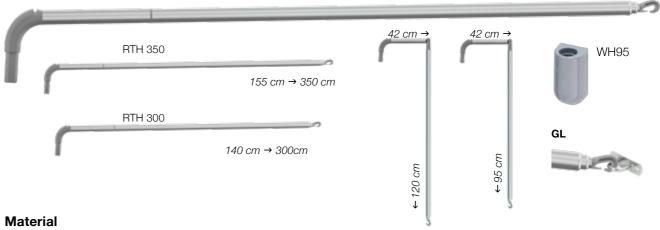

ropimex® telescopic screens are made of anodised aluminium, high-quality, glass-fibre reinforced plastics. Easy to clean and to disinfect.

| | (|
|--|---|
|--|---|

| Model | Telescopic screen extension | Weight | Rings | Curtains | Wall mount |
|---------|------------------------------------|--------|-------|----------|---------------------------|
| RTH 300 | 300 cm with hook at the distal end | 1,0 kg | 25 | TCS 330 | WH 95 with end support GL |
| RTH 350 | 350 cm with hook at the distal end | 1,1 kg | 30 | TCS 390 | WH 95 with end support GL |

RST: adjustable ceiling mounts

| Model | Extension | Room height |
|---------|--------------|--------------|
| RST 4 | 45 - 75 cm | 245 - 275 cm |
| RST 8 | 75 - 135 cm | 275 - 335 cm |
| RST 10* | 110 - 200 cm | 335 - 400 cm |

*not illustrated





The glass-fibre reinforced polyamide disc at the bottom end of the ceiling mount is used to hold the joints of the telescopic screen cubicles and the hooks of the telescopic arms, models RTH and RTA.



Wall and rail brackets

WH - Wall brackets **GSH** - Brackets for equipment rails





WH: Wall brackets for telescopic screens



| Model | | Dimensions |
|-------|--|------------------------------|
| WH 95 | Wall bracket for all telescopic screens, die-cast aluminium, concealed screws, adjustable to compensate for unevenness of the wall, colour coated, colours: white (RAL 9010), signal grey (RAL 7004) | Height 10 cm Width 6 cm |
| WH | Wall bracket for all telescopic screen | Height 16,5 cm Width 6 cm |
| WH/LA | Wall bracket for bridging service ducts up to 15 cm | Height 16,5 cm Width 6 cm |
| WH/F | Wall bracket with knurled thumb screw | Height 16,5 cm Width 6 cm |

GSH: Brackets for equipment rails



| Model | | Dimensions |
|--------|--|------------------------------|
| GSH/F | Bracket for equipment rail 25/10 mm, fixing by means of clamping screw | Height 13,5 cm Width 4 cm |
| GSH/N | Bracket for equipment rails, wall-supported, height-adjustable | Height 55 cm Width 5 cm |
| GSH/DK | Bracket with "double clamp" for equipment rails, height-adjustable | Height 55 cm Width 5 cm |
| GSH/95 | Bracket for equipment rails, adjustable tilt | Height 10 cm Width 6 cm |
| GSH/V | Bracket for vertical tubes, max. 38 mm tube diameter, adjustable tilt | Height 10 cm Width 13 cm |

Mobile screens FG95









The mobile screen '95 is ready to use in only a few seconds and is quickly returned to its parked position. Its smooth and easy movement, low weight and high degree of stability ensure simple handling.

The mobile screen, fitted with one or two telescopic screens, is ideal for mobile screening, e.g. for corridor occupancy, in multi-bed rooms, in the outpatients department or at the gynaecology chair.











Mobile screen '95 with one or two telescopic screens in use

FG95 trolley

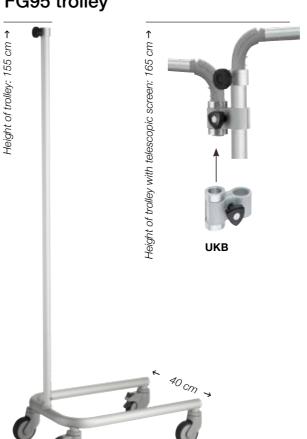

| Model | |
|-------|---|
| FG95 | Trolley , 155x60x40 cm (H/D/W), 4 castors ø 100 mm, 2 of which are lockable. Aluminium anodised, glass-fibre reinforced polyamide, corrosion-resistant, disinfectable. |
| LA | Electrically conductive castors available for an extra charge. |
| UKB | Universal clamp for holding a second telescopic screen - RTI 1.3 or RTI 1.6. |

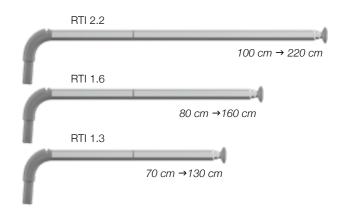

We recommend the following fitout:

(€

| Model | With one telescopic screen | Extension | Curtains |
|---------|--|----------------------|--------------------------|
| RTI 2.2 | Telescopic screen, fold-down | 220 cm | TCS 212, CQ 212, VHC 212 |
| Model | With two telescopic screens | Extension | Curtains |
| RTI 2.2 | Fold-down telescopic screen, (can only be used in the trolley, not suitable for the UKB clamp) | 220 cm | TCS 212, CQ 212, VHC 212 |
| RTI 1.6 | Telescopic screen, fold-down | 160 cm | TCS 152, CQ 152, VHC 152 |
| RTI 1.3 | Telescopic screen, fold-down | 130 cm | TCS 122, CQ 122; VHC 122 |
| UKB | Universal clamp for use of a second telescopic screen | n, telescopic screen | s: RTI 1.3, RTI 1.6 |





Vario rail system RVS






- quickly assembled
- mega variable durable

Easy ordering: A simple sketch suffices!

Simply prepare a hand-drawn, dimensioned sketch of the required room layout, enter the widths and lengths as well as the room height and the required headroom.

We will put together the complete system for you.

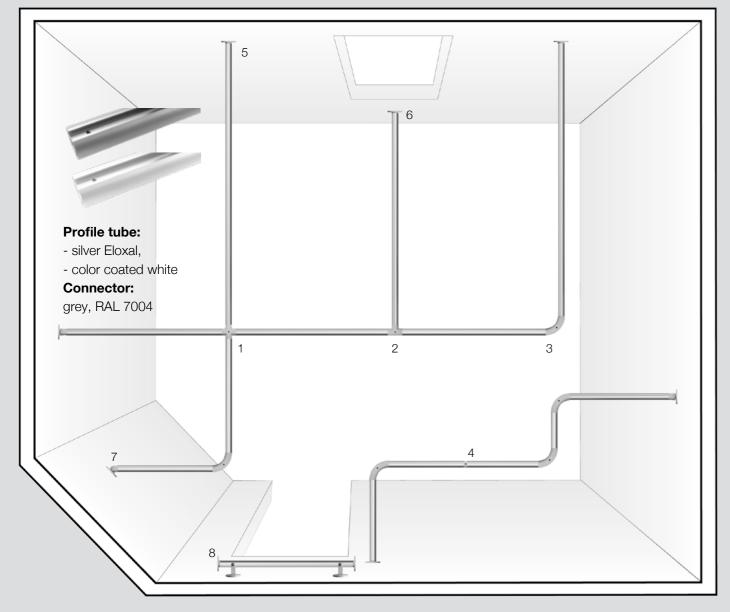



Curtain ring RVS/VR

Curtain ring made of unbreakable polyamide: Releases itself from the curtain eyelet if overloaded (approx. 2 kg).



Ringstopper: for fixation of a curtain ring at the beginning or the end of the rail.



Silicone cover profile RVS/AP

With the RVS connectors, you can create cabs as you wish



Cross-connector (RVS/KV)

T-connector (RVS/TV)



(radius 60 mm)

Corner solutions without sharp edges: with the curved connector RVS/BV



Change later: simply disconnect the profile tube and install the connector of your choice, e.g. linear connector RVS/LV


RVS-Wall connections - for every requirement



Free-standing end: End cap RVS/EK stops the curtain.



Straight at the wall: Wall connector RVS/WA



Sloped walls, acute angles: the Vario wall connector RVS/WAV compensates for and levels out asymmetries up to 180° and length differences up to +/- 5 mm.

Flexible to the ceiling - RVS ceiling connectors



Mounted directly under the ceiling: with ceiling bracket RVS/DH (distance from top of ceiling to bottom of rail approx.



Suspended at headroom height: with the adjustable ceiling mount (+/- 20 mm) RVS/DS.



For free-standing end RVS rails: adjustable double ceiling mount (+/- 2cm) RVS/DDS.



Easy above the lintel: e.g. at windows or doors using the wall connector




Anchoring on profile rail:

possible along the whole length by means of square nut; for adjustable ceiling mount RVS/DS or with ceiling bracket RVS/DH. Max. spacing: 2 m.



Anchoring via all connectors: Standard threaded hole for screwing in

the adjustable ceiling mount RVS/DS or the ceiling bracket RVS/DH ensures firm support.



RVS/AH for Corner- and T-Solutions.




Curtains

Flame-resistant curtains can save lives!

ropimex® multifunctional textiles have more than proven themselves in practical application – whether here with us or in Tahiti or even Yakutsk.

We only use flame retardant qualities that will meet even the most stringent hygiene requirements. The longevity of our materials meanwhile guarantees a most cost-effective price-performance ratio.

Trevira®CS Bioactive

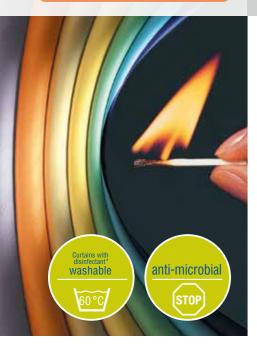

TCS: ropimex®-curtains made of Trevira®CS Bioactive have been tried and tested for 20 years

Permanently flame-retardant and anti-microbial

- 100% Polyester, permanently flame-retardant
- the fabric meets fire class B1 as per DIN 4102-1 and B-s1 d0 as per DIN EN 13501-1
- with the fire resistance indelibly anchored in the molecular structure
- Trevira®CS Bioactive is permanently anti-microbial
- permeable to daylight, ideal if there are several partitions in a room
- light-fast, dimensionally stable, crease-resistant, long service life
- certified to Oeko-Tex standard 100
- fabric weight: ca. 115 g/m²



Size table

| | Width | Χ | Height in cr | |
|----------------------------|-------|---|--------------|--|
| TCS 110 | 110 | Х | 175 | |
| TCS 121 | 140 | Х | 120 | |
| TCS 122 | 140 | Х | 140 | |
| TCS 123 | 140 | Х | 175 | |
| TCS 151 | 170 | Х | 120 | |
| TCS 152 | 170 | Х | 140 | |
| TCS 153 | 170 | Х | 175 | |
| TCS 200 | 200 | Х | 175 | |
| TCS 211 | 230 | Х | 120 | |
| TCS 212 | 230 | Х | 140 | |
| TCS 213 | 230 | Х | 175 | |
| TCS 215 | 250 | Х | 175 | |
| TCS 217 | 270 | Х | 175 | |
| TCS 300 | 300 | Х | 175 | |
| TCS 330 | 330 | Х | 175 | |
| TCS 360 | 360 | Х | 175 | |
| TCS 390 | 390 | Х | 175 | |
| TCS 420 | 420 | Х | 175 | |
| TCS 460 | 460 | Х | 175 | |
| TCS 500 | 500 | Х | 175 | |
| Special designs on request | | | | |

trevira

Available in 10 colours





grey













peach











azur champagne

staph CHEK®

VH/C ropimex®- curtains made of staph CHEK

staph CHEK, the fabric for sanitary blocks, showers and bathrooms



• anti-bacterial

• flame-retardant, fire class M2

• ideal for use as a shower curtain

• skin-friendly / does not stick to the body

• anti-static

• impervious to liquids

• staining- and soiling-resistant

• in areas where careful treatment cannot be guaranteed because of exceptional circumstances

• simply wipe down with a desinfectant


• durable

• fabric weight: ca. 330 g/m²



| | Width | Х | Height in cm |
|----------|-------|---|--------------|
| VH/C 100 | 100 | Х | 80 |
| VH/C 120 | 120 | Х | 80 |
| VH/C 121 | 140 | Х | 120 |
| VH/C 122 | 140 | Х | 140 |
| VH/C 151 | 170 | Х | 120 |
| VH/C 152 | 170 | Х | 140 |
| VH/C 211 | 220 | Х | 120 |
| VH/C 212 | 220 | Х | 140 |
| | | | |

Special designs on request





1. Permanently

embedded:

components

active antibacterial



white



Available in 5 colours











beige

mint

^{*} Request our test report concerning disinfectant resistance based on DIN EN ISO 2812-4:2007

Curtains

Cleanique

CQ ropimex®- seamless Hygienic-curtain of the new generation

CleanIque


Top level hygiene:

- antimicrobial activity
- beautiful draping properties
- soft feel
- approved for skin contact in accordance with FDA (ISO 10993)
- flame-retardant, fire class M1
- thermoplastic polyether polyurethane
- water-repellent
- light-fast
- resistant to rubbing
- tear-proof
- recyclable
- seamless
- durable • non-stick
- fabric weight: ca. 270 g/m²





Available in 2 colours





23333333

sky blue

Size table

| | Width | Х | Height in cm |
|--------|-------|---|--------------|
| CQ108 | 100 | Х | 80 |
| CQ128 | 120 | Х | 80 |
| CQ121 | 140 | Х | 120 |
| CQ122 | 140 | Х | 140 |
| CQ123 | 140 | Х | 170 |
| CQ151 | 170 | Х | 120 |
| CQ152 | 170 | Х | 140 |
| CQ153 | 170 | Х | 170 |
| CQ211 | 220 | Х | 120 |
| CQ212 | 220 | Х | 140 |
| CQ213 | 220 | Χ | 170 |
| CQ1220 | 120 | Χ | 190 |
| CQ1420 | 140 | Х | 190 |
| CQ1620 | 160 | Х | 190 |
| CQ1820 | 180 | Х | 190 |
| CQ2020 | 200 | Х | 190 |
| CQ2220 | 220 | Х | 190 |
| CQ2420 | 240 | Х | 190 |
| CQ2720 | 270 | Х | 190 |
| CQ3020 | 300 | Х | 190 |
| CQ3320 | 330 | Χ | 190 |

Special designs on request

Zerøtex

ropimex® Zerøtex - non-woven Saves time and money



- non-woven 100% Polypropylen (PP)
- flame-retardant, fire class B-s1 d0, DIN EN 13501
- recyclable
- skin-friendly, physiologically completely harmless
- resistant to almost all solvents
- ideal for hygiene-sensitive areas
- in healthcare facilities
- in public institutions
- fabric weight: 70 g/m²

Size table


| | suitable for | | | |
|-------|--------------|-----|---|-----|
| Z1516 | RTS 1.2 | 150 | Х | 160 |
| Z1517 | RTI 1.3 | 150 | Х | 175 |
| | | | | |
| Z1816 | RTS 1.5 | 180 | Х | 160 |
| Z1817 | RTI 1.6 | 180 | Х | 175 |
| | | | | |

| 16 | RTS 1.5 | 180 | Х | 160 |
|----|--------------------|-----|---|-----|
| 17 | RTS 1.5 RTI 1.6 | 180 | Х | 175 |
| | | | | |
| 16 | RTS 2.1 | 210 | Х | 160 |
| | | | | |

Width x Height in cm

| Z2117 | RT 2.2 | 210 | Χ | 175_ |
|----------------------|-------------|--------|------|----------|
| | | | | |
| Minimum _I | ourchase 10 | pieces | / pe | er color |

Suitable for ropimex RTS telescopes and RTI as well as the RVS rail system













light grey

apple green

creme



^{*} Request our test report concerning disinfectant resistance based on DIN EN ISO 2812-4:2007



ropicare

ROC ropimex® folding curtain

ropi*CARE*

Easy care - no washing

ropicare is ideal for users whose hygiene conception is directed against the use of classic curtains, which require regular cleaning, mostly by external service providers

- PVC / Polyester fabric
- dimensionally stable, UV-resistant
- flame-retardant, fire class B-s2 d0 , DIN EN 13501
- fabric weight: 570 g/m²
- for all healthcare facilities
- ropicare is quickly ready for use and, thanks to its vertical perforation, can be folded up to save
- Curtain height: 175 cm
- Slat width: 20 cm,
- Start and end slat: 15 cm
- smooth surfaces suitable for disinfection
- simply wipe and disinfect to clean*

| 0) |
|-----|
| m |
| ; |

| | VVIGITI | | Tielgiit iii ciii |
|---------|---------|---|-------------------|
| ROC 110 | 110 | Х | 175 |
| ROC 130 | 130 | Х | 175 |
| ROC 150 | 150 | Х | 175 |
| ROC 170 | 170 | Х | 175 |
| ROC 190 | 190 | Х | 175 |
| ROC 210 | 210 | Х | 175 |
| ROC 230 | 230 | Х | 175 |
| ROC 250 | 250 | Х | 175 |
| ROC 270 | 270 | Х | 175 |
| ROC 290 | 290 | Х | 175 |
| ROC 310 | 310 | Χ | 175 |


Special designs on request





Optionally available with a transparent area covering the entire width of the curtain.

Available in 8 colours



yellow



carambola





light blue







Pratice: Ringstopper to block the curtain at the beginning

^{*} Request our test report concerning disinfectant resistance based on DIN EN ISO 2812-4:2007



Lamella screen

CLS Screen protection in slat format: just go through

For care-sensitive areas

The staph CHEK LS lamella screen with a proven antimicrobial effect is particularly suitable for areas that require care, e.g. B. emergency room, recovery room and care.

The chained slats allow you to quickly step through or check the patient at any point on the curtain. The slats can be easily connected to each other by hanging the last eyelet of one slat and the first eyelet of the next slat together in a curtain ring - this way you can create extra large privacy areas.

- stable and compact
- anti-bacterial
- flame-retardant, fire class M2
- ideal for use as a shower curtain
- skin-friendly / does not stick to the body
- anti-static
- impervious to liquids
- staining- and soiling-resistant
- in areas where careful treatment cannot be guaranteed because of exceptional circumstances
- simply wipe down with a desinfectant
- durable
- fabric weight: ca. 330 g/m² (30°C)





Width of slat: 27 cm, height 180 cm, with eyelets

| | Anz. L | amellen | Breite cm |
|-------|--------|---------|-----------|
| CLS: | 3 | 3 | 67 |
| CLS 4 | 4 | 4 | 87 |
| CLS: | 5 | 5 | 107 |
| CLS | 6 | 6 | 127 |
| CLS | 7 | 7 | 147 |
| CLS a | 8 | 8 | 167 |
| CLS ! | 9 | 9 | 187 |
| CLS | 10 | 10 | 207 |
| CLS | 11 | 11 | 227 |
| CLS | 12 | 12 | 247 |



quick control look between two slats



Simply connect slats – expandable as required



Dimensions: slat of 27 x 180 cm, 3 eyelets,

overlap: 7 cm







light blue





white

yellow

mint







mobile

spatial flexibility in everyday care and treatment work: in hospitals and care of the aged, in doctors' surgeries as well as in clinical rooms. At the same time you guarantee patients the necessary discretion. Position, fold open, fold together after use and roll away – care of the easy-clean surfaces

Visually the design award-winning folding screens contribute to the general feeling of well-being

made of aluminium and scratch-resistant polycarbonate is just as easy as the handling.

- in the doctor's surgery or in a clinic.

()





Simply drive from site to site



Set up quickly.



Available in 10 colours and 4 design options (see page 36-37)



Folding screens



Technical data





Non-see-through 360°

The RTC unit (ropimex®-Turn&Connect) enables 360° leaf rotation.

Accessories available: Clamp set for service rail Spacer for wall-mounting











Note: Mounted on

Well-designed and stable

a trolley, the folding screen is only mobile. It is therefore not possible to convert screen or to fix it to an equipment rail or column.







Possibility to fix until 4 folding walls

| Folding screen for wall-mounting RFW | | Screen | open width |
|--------------------------------------|---|---------|------------|
| Leaf width | 30 cm | 3-leaf | 90 cm |
| Heights | 145 / 165 / 185 cm | 4-leaf | 120 cm |
| Weight | 3,00 / 3,50 / 4,00 kg/leaf | 5-leaf | 150 cm |
| Frame | Frame and hinged profiles: extruded aluminium (Al Mg Si 05), anodised surface, connecting screws: V2A stainless steel | 6-leaf | 180 cm |
| Plastic parts | PA 6 GF 15, polyamide with 15% glass fibres | 7-leaf | 210 cm |
| | Polycarbonate, 2 mm, white, translucent, flame resistant, | 8-leaf | 240 cm |
| Infill panels | construction material class B1, DIN 4102-01, extremely impact resistant | 9-leaf | 270 cm |
| Care | commercially available cleaning product and disinfectant* | 10-leaf | 300 cm |



| Accessories | |
|-----------------------------------|--|
| Spacer set for wall fixing RFW-WA | Spacer for wall fixing, standard spacing 100 mm, special length to customer-specified dimensions possible up to 400 mm |
| Clamp set RFW-KLS | Clamp set for fixing to double-track standard rail |



| The mobile version with max. 10 leaves enables mobile use. Please note: mobile folding screens are available in heights 145 and 165 cm only. | | |
|--|---|--|
| RFW-FG4 | Height 145 cm, weight 14 kg | |
| RFW-FG6 | Height 165 cm, weight 15 kg | |
| Trolley base | 52 x 59 cm | |
| Folding screen | For description and screen length see above (RFW) | |



| Stainless steel co | lumn for folding screen |
|--------------------|--|
| | mounting is not possible. Stainless steel column 5 cm. Available in 3 heights. |
| RFW-ES4 | Height 145 cm, weight 5,00 kg |

| RFW-ES6 | Height 165 cm, weight 5,50 kg |
|----------------|---|
| RFW-ES8 | Height 185 cm, weight 6,20 kg |
| Upright | 5 x 5 cm |
| Folding screen | For description and screen length see above (RFW) |



Folding screens



Colours and designs

Available in 10 colours and 4 design options



Retro design



- Can be combined leaf-wise with PLAIN
- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back
- Specify whether right or left-hung







copper



yellow



Design Flowers



- Can be combined leaf-wise with PLAIN
- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back
- Specify whether right or left-hung



green



blue



copper




yellow



Plain



- Optional continuous or leaf-wise covering Standard colour: white, translucent
- Film overlay on both sides,



Plain

Ginkgo design



- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back
- Specify whether right or left-hung
- Can be combined leaf-wise with PLAIN



Monster design



- Can be combined leaf-wise with PLAIN
- Film overlay on one side
- The white-translucent polycarbonate enables the design to show through at the back
- Specify whether right or left-hung



Butterfly Folding wall





((



Ideal for mobile shielding in addition to the RFW



| | Model | ropimex [®] Butterfly Folding wall |
|---|---------|--|
| 7 | RBF | 3-leaf made in polycarbonate, with middle leaf centred on double T-leg and 360° rotatable leaves on either side, fold-away. Leaf widths 45/50/45 cm, height 165 cm, weight 15,60 kg |
| 1 | RBF 200 | 3-leaf made in polycarbonate, with middle leaf centred on double T-leg and 360° rotatable leaves on either side, fold-away. Leaf widths 65/70/65 cm, height 165 cm, weight 18,00 kg |

Material

Frame and hinges: extruded aluminium (Al Mg Si 05), anodised surface, connecting screws: V2A stainless steel, Infill panels Polycarbonate, 2 mm, Plastic parts PA 6 GF 15, polyamide with 15% glass fibres

Colour

white, translucent








Sticker bows



Monsters: Especially for yours young patients














Wall mounted Mobile Column mounted



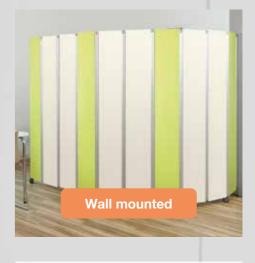





Available in 5 colours (see page 42)


by Resopal with stable frame construction. Easy to clean and/or to disinfect.*

^{*}Request our test reports concerning the disinfection based on DIN EN ISO 2812-4:2007.

Folding wall



Technical data

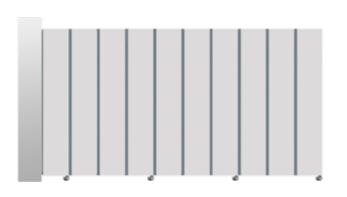




Non-see-through 360° hinges. The RTC unit (ropimex®-Turn&Connect) enables 360° leaf rotation.

Accessories available: Clamp set for service rail Spacer for wall-mounting






Wall mounted

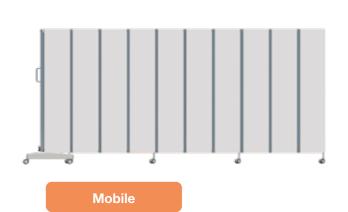



Note: Mounted on a trolley, the folding screen is only mobile. It is therefore not possible to convert

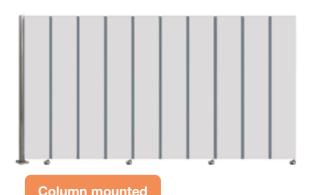









Possibility to fix until 4 folding walls

DIVI max available in 5 colors









| Model DX - DIVI max - wall mounted | | |
|------------------------------------|--|--|
| Width / panel | 30 cm | |
| Heights | 150 / 180 cm | |
| Weights | 3,73 / 4,06 kg/panel | |
| Frame | Frame and hinge components: extruded aluminium (AI Mg Si 05), anodized surface, fastening: V2A Stainless steel | |
| Plastic parts | PA 6 GF 15, polyamide with 15% glass fibres | |
| Panel | high-quality HPL (High-Pressure-Laminate) by Resopal | |
| Care-Instructions | clean with disinfectants in current general use* | |

| | Width when o | opened out |
|---|--------------|------------|
| | 3-panels | 90 cm |
| | 4-panels | 120 cm |
| | 5-panels | 150 cm |
| ' | 6-panels | 180 cm |
| | 7-panels | 210 cm |
| | 8-panels | 240 cm |
| | 9-panels | 270 cm |
| | 10-panels | 300 cm |
| | | |



| Accessories | |
|--|---|
| Braces for wall mounting Set DX-WA | braces for wall mounting (set of 2 pcs). Lenght 100 mm, specific sizes available upon request |
| Clamps-Set DX-KLS | clamps for track mounting (set of 2 pcs) |



Trolley for folding wall DIVI max

To ensure the best possible stability, the mobile version is available with up a maximum of 10 panels only and the height is 163 cm.

Height 163cm, weight of the feet: 17,00 kg

Size of base: 52 x 59 cm

Folding wall: description and width: see above



DX-ES Stainless steel column for folding DIVI max

Perfect for anywhere where there are no attachment points. This column has 4 sides each 5 cm, available in 2 heights

DX-ES5: height 150cm, weight: 5,20 kg

DX-E85: height 180 cm, weight: 6,02 kg

5 x 5 cm

Folding wall: description and width: see above

42

^{*}Request our test reports concerning the disinfection based on DIN EN ISO 2812-4:2007.

Lightweight paravents





(€



ropimex®-Lightweight paravents are convincingly easy to handle. The 360° non-see-through hinges each leaf enable each leaf to be moved into the required position. Standard fabric covering with staph CHEK fabric, with Trevira®CS for an additional charge.

Please note: Paravent leaves must always be positioned at an angle to each other, unless the ropimex® base (model RLP/C) is used.




RLP in retirement




Folded together, a storage space can be found anywhere



Base for stabilising a single or several paravents to make use of the open width or to form a routing system




Covering: without folds. Opaque 360° hinges.

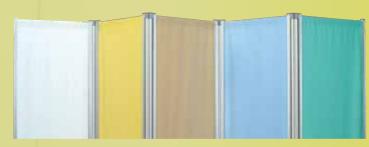

Leaf-wise colour selection also possible.



Standard version without castors. Can be supplied with castors for an additional charge. Only for models RLP/3 and RLP/5



staph CHEK



| Model | ropimex®-lightweight paravent | Leaf | Weight | Width | Height |
|-------|-------------------------------|------|--------|--------|--------|
| RLP/2 | Lightweight paravent, 2-leaf | 2 | 3,8 kg | 100 cm | 165 cm |
| RLP/3 | Lightweight paravent, 3-leaf | 3 | 5,7 kg | 150 cm | 165 cm |
| RLP/4 | Lightweight paravent, 4-leaf | 4 | 7,6 kg | 200 cm | 165 cm |
| RLP/5 | Lightweight paravent, 5-leaf | 5 | 9,5 kg | 250 cm | 165 cm |

| Material | Frame: Aluminium design profiles, natural-anodised, foot and cover caps made of polyamide, light grey. Optional: Plastic castors, black | | | |
|----------|--|--|--|--|
| Covering | Standard covering staph CHEK. staph CHEK fabric is antibacterial, flame-resistant, self-extinguishing, antistatic and durable. It does not have to be washed. Stains are easily wiped off with a desinfectant. | | | |
| Colours | light blue, white, yellow, beige, mint | | | |

Lightweight paravents

RLP/C

Base

RLP/C base to stabilise the paravent



Base for holding up to 4 paravents



2-leaf paravent in the base





1 paravent at right-angles 3 paravents in the base

4 paravents in the base



Paravents in a row as a routing system

| Model | ropimex®- base | | |
|-----------------------|--|--|--|
| RLP/C | Base to stabilise the paravent when opened out straight (use of the open width) nd/or for holding several paravents (max. 4 per base), as a partition or for setting up a routing system | | |
| Material | Glass-fibre reinforced polyamide (GRP) | | |
| Dimensions/ Weight | 8 x 15 x 30 cm (H x W x D), weight 1.3 kg | | |
| Variations | 1 Paravent up to 4 paravents possible at right-angles | | |


Lightweight paravents



Wall mounted

RLP/W for wall-mounting





- Spacer for wall fixing
- Upright made of stainless steel



| 1 | Model | ropimex®- Llightweight paravent with wall connector | Leaf | Weight | Width | Height |
|---|--------|---|------|--------|--------|--------|
| | RLP/W2 | | 2 | 3,8 kg | 100 cm | 165 cm |
| | RLP/W3 | with wall connector, on castors | 3 | 5,7 kg | 150 cm | 165 cm |
| | RLP/W4 | | 4 | 7,6 kg | 200 cm | 165 cm |
| | RLP/W5 | | 5 | 9,5 kg | 250 cm | 165 cm |

Accessories

| RLP-WA | Spacer for wall fixing, standard spacing 100 mm, special length to customer-specified dimensions possible up to 400 mm |
|---------|--|
| RLP-KLS | Clamp set for fixing to double-track standard rail |
| RLP-ES | Upright made of stainless steel for RLP/W, for free-standing installation in the room, height 1,650 mm |

Butterfly Paravent RBP





(€



Butterfly paravent, mobile, ideal for screening the bottom ends of beds

ropimex® butterfly paravent RBP 3-leaf, with middle leaf centred on double T-leg and 360° rotatable leaves on either side, Leaf widths 45/50/45 cm (140 cm), height 165 cm, weight 8.9 kg 3-leaf, with middle leaf centred on double T-leg and 360° rotatable leaves on either side, RBP200 fold-away. Leaf widths 65/70/65 cm (200 cm), height 165 cm, weight 11.0 kg

| Material | Frame: Aluminium design profiles, natural-anodised, made of polyamide, light grey. Plastic castors, black |
|----------|--|
| Covering | Standard covering staph CHEK. staph CHEK fabric is antibacterial, flame-resistant, self-extinguishing, antistatic and durable. It does not have to be washed. Stains are easily wiped off with a desinfectant. |
| Colours | light blue, white, yellow, beige, mint |

Covering (see page 23)




Shower splash guard Telescopic screen cubicles **RKLE**







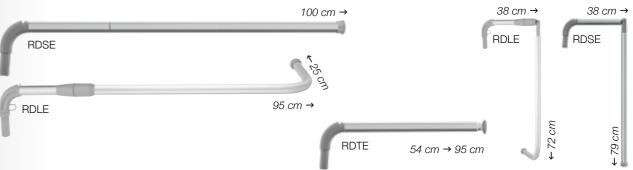

| Model | | Dimensions | Recommended curtains | Rings |
|------------|---|------------|----------------------|-------|
| RDSE | Splash guard arm swing-out and fold-down | 100 cm | VH/C 100 CQ 108 | 8 |
| RDTE | Splash guard arm, telescopic swing-out | 95 cm | VH/C 100 CQ 108 | 8 |
| RDLE | Splash guard arm, L-shaped, can be used on the right and left-hand side, side leg 25 cm, swing-out and fold-down | 95 cm | VH/C 120 CQ 128 | 10 |
| Wall mount | Recommended wall mount: WH, WH 95 (for a description see p.13) | | | |
| VR | ropimex®-curtain rings are always included with our telescopic screens, telescopic arms and telescopic screen cubicles. Colour: grey. | | | |

ropimex°-Telescopic screen cubicles Model RKLE

(wall fixing)

With this space-saving model it takes just a few seconds to create a screen for washing, changing, radiotherapy or inhaling, either as a corner solution or as a U-shaped solution.





| Recommended curtains (see page 23-24) | |
|---------------------------------------|------------|
| staph CHEK | Cleanique® |
| | |



Satisfied customers all over the world



Since 1976, ropimex® has been busy finding solutions to protect the privacy of the sick and those in need of care.

The telescopic screens of the early years are still in use today. From them a system developed, whose diversity, use and combination options provide a suitable solution for each and every customer.

All these properties, top advice from authorised stockists and the fastest possible delivery have secured ropimex® more than 80,000 satisfied users to date, all over the world.









For your safety



ropimex® products conform to the highest safety standards.

ropimex® curtains made of Trevira®CS pass every fire test worldwide and are tested and certified to the Öko-Tex standard 100 Europe-wide.

ropimex® Privacy Systems - 45 years of experience in designing medical inventory for hospitals, therapy centers and care facilities. Our products meet the regulatory requirements for medical devices.

The systems are designed so that a patient zone / intimate zone can be created for virtually any existing condition - stationary or mobile.

ropimex® privacy systems are the customizable accessories for medical devices such as patient beds, treatment couches and treatment chairs in medical facilities.

ropimex® privacy systems are compliant with the Swiss Privacy Policy, which requires confidential handling of patient-related data. These patient-related data also include explicit discussions between patients and patients and the preservation of privacy in treatment and patient care.



Fabric sample cards



Do you need a fabric sample card? Just phone 0049 6821 91277-0 or send an email info@ropimex.com



Screen-Systems

Telescopic screens I Telescopic arms I Mobile screens I Vario rail system Curtains I Folding screens I Paravents I Shower splash guard



taylordolman

tel: 0845 838 0600 email: info@taylordolman.com www.taylordolman.com

