

taylordolman (E

email: info@taylordolman.com

Cl/SfB (73.1) x (3

May 2010




Diagonal


Electrical height adjustable frame for wall units Wall units become easily reachable from sitting position Ideal for nursing homes and institutions

- The Diagonal does not only adjust units by 43 cm but also moves diagonal forward by 18 cm.
- A push button allows control of movement to the wanted position and by a single press the frame returns to top possition.
- Standard wall units with height 70-80 cm can be used.
- A safety stop plate is recommended to prevent trapping when lowering.
- Light can be fitted in the safety stop plate to improve visibility.
- Build in measurement (depth of frame) is only 11,5 cm.
- Diagonals are available from 40-180 cm in increments 10 cm.
- Diagonal is also ideal for private homes

Diagonal

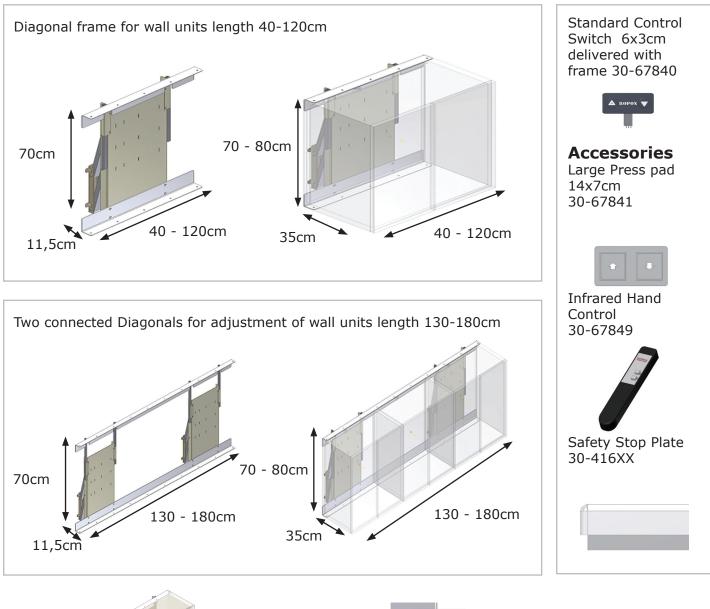





ROPOX Tips

- Allow a space of 3-5 mm on each side of units for free movement.
- To line up adjacent fixed wall units space them off the wall by 11,5cm.
- Smaller doors of 30/40 cm may be easier to open at worktop height.
- The control switch should be located in the fascia of the worktop below or if this is not a solution a hand control can be a possibility.
- -Max load of frames 120 kg, evenly distributed.

