

”A table frame that makes kitchens more accessible”



ROPOX FLEXIPLUS & FLEXI PLUS CORNER

A QUIET, HEIGHT-ADJUSTABLE TABLE FRAME DESIGNED FOR ACCESSIBLE KITCHENS

FlexiPlus is a height-adjustable table frame that comes with a 300 mm adjustment range as standard. If required, it is possible to programme the height adjustment to an even larger range, from 0-660 mm.

The table frame is an improved version of the FlexiElectric table frame. With FlexiPlus you get a more quiet height adjustment, an elegant cover of mounting screws, a more flexible placing of legs and fewer components. Also, you can get a control device with a key lock or as a remote control.

The built-in ROPOX Sicuro anti-collision is an extra safety feature. If you choose to add the safety stop list on the front edge of the worktop, you can avoid trapping risk when operating the table.

If the existing piping hinders the mounting of the table frame, you can install FlexiPlus with protruding legs using distance brackets. This way, you get more room on the worktop, e.g. for sink or hotplates.

On FlexiPlus you can level out the worktop in three dimensions. This allows you to accurately adjust the worktop and get it plumb and level.



The Ropox Connect app allows you to set FlexiPlus to a specific height via Bluetooth wireless technology

ROPOX™


BETTER WAYS TO BETTER DAYS

- A PART OF AddLife®


ROPOX FLEXIPLUS/CORNER

Max. load: 150 kg evenly distributed
 Height: 65-95 cm
 Length: 60-300 cm
 Colour: RAL 9010
 Adjustment: 0-30 cm (possible 0-66 cm)

FlexiPlus – standard frame for worktop

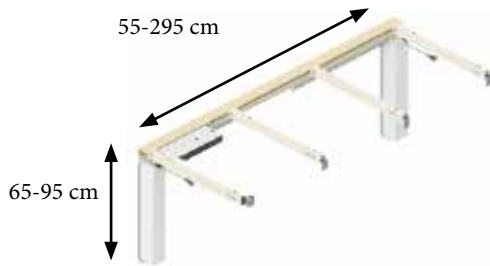

FlexiPlus – frame including worktop and fascia

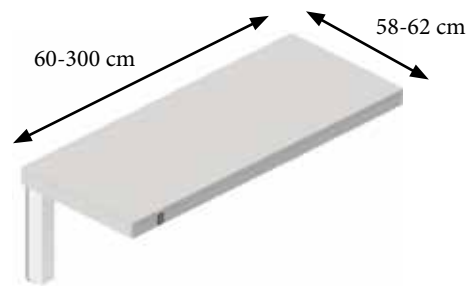

MODELS/ITEM	30-90060/ 30-90100	30-90105/ 30-90200	30-90205/ 30-90240	30-90245/ 30-90300
LENGTH OF WORKTOP	60-100 cm	105-200 cm	205-240 cm	245-300 cm

FlexiPlus Corner, 90° corner angle

30-91001
30-91002



FlexiPlus Corner, 90° up to 160° corner angle

30-93xxx-xxx



ACCESSORIES

Control, wireless
30-90540



Control, with lock
30-90550



Safety stop, length 120-620 cm
30-92xxx



Height adjustable programming, 0-66 cm
30-93700



Bracket, 7 cm space to wall
30-90530



Corner bracket, 90°-160°
30-90570



Support foot, 49 cm aflastning af væg
30-67705



Support arm, depth 38-72 cm
30-67xxx



Fitting for panels
30-67760



Cover for plumbing
30-67635



taylordolman

tel: 0845 838 0600
email: info@taylordolman.com
www.taylordolman.com

ROPOX™

BETTER WAYS TO BETTER DAYS

- A PART OF AddLife